

UniFi UISP Branding

Q

enterprise campus 4

- Switching
- WiFi
- Camera Security
- Door Access
- Integrations
- Advanced Hosting


Enterprise > Enterprise Campus 48 PoE

Datasheet


In The Box

Marketing Images

Installation Guide

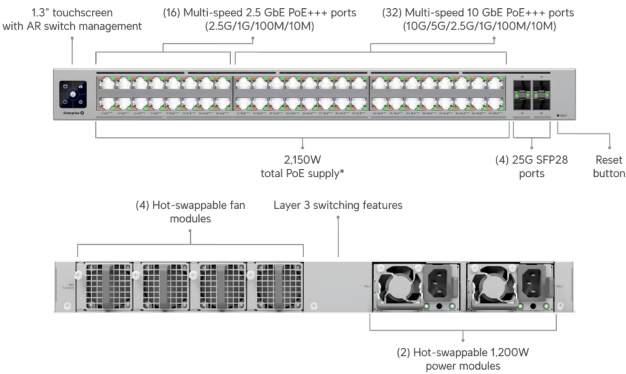

*With 200-240V AC in Shared Mode. Total available PoE is 1,750W with 100-120V AC in Shared Mode and 950W/750W in Redundant Mode with 200-240V/100-120V AC.

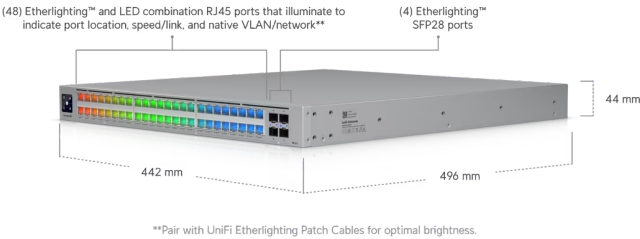

Overview

Dimensions

442.4 x 43.7 x 496 mm
(17.4 x 1.7 x 19.5")

Port Layout

2.5 GbE RJ45	16 (All PoE+++) (2.5G/1G/100M/10M)
10 GbE RJ45	32 (All PoE+++) (10G/5G/2.5G/1G/100M/10M)
25G SFP28	4 (25G/10G/1G)
Max. PoE Output	Up to PoE+++ 200-240V AC Shared Mode: 2,150W 100-120V AC Shared Mode: 1,750W 200-240V AC Redundant Mode: 950W 100-120V AC Redundant Mode: 750W
Total PoE Availability	

Redundancy	(2) Hot-Swappable PSUs (4) Hot-Swappable Fans
Layer 3	✓
Form Factor	Rack mount (1U, Full-Depth)
Etherlighting™	✓

^ **Performance**

Switching Capacity	920 Gbps
Total Non-Blocking Throughput	460 Gbps
Forwarding Rate	684 Mpps
Supported VLANs	1,000
MAC Address Table Size	128,000
L3 Table Size	
ARP Entries	128,000
IPv4 Routes	256,000
Packet Buffer Size	8 MB
Access Lists	
IPv4	256
MAC	256

^ **Layer 3 Features**

DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓

^ **Layer 2 Features**

LACP Port Aggregation	✓
STP & RSTP	✓
QoS (DSCP)	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓

Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓

^ **Hardware**

PoE Ports

PoE+++	48
--------	----

Max. PoE Wattage per Port by PSE

PoE	15.4W
PoE+	30W
PoE++	60W
PoE+++	90W

Max. Power Consumption	250W (Excluding PoE Output) 2400W (Including PoE Output)
------------------------	---

Power Method	(2) Universal input, 100—240V AC, 50/60 Hz
Power Input Method	(2) AC input, Hot-swappable power modules
Power Supply	(2) Hot-swappable AC/DC 1,200W power modules
Supported Voltage Range	100—240V AC
Management	Ethernet AR
Weight	Without mounting brackets: 9.46 kg (20.9 lb) With mounting brackets: 9.56 kg (21.1 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	482.6 mm (19") four-post racks Posts depths ranging from 650 to 1,000 mm (25.6–39.4")
LCM Display	1.3" touchscreen
Fan Method	(4) hot-swappable fan modules
ESD Protection	Air: $\pm 30\text{kV}$, contact: $\pm 19\text{kV}$
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP28	✓
LEDs	
Ethernet	✓
System	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC
^ Software	
Application Requirements	
UniFi Network	Version 9.0.114 and later

Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.