

## Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System


New Integrations

Accessories

[airMAX Rocket AC Lite](#)

Datasheet

Marketing Images

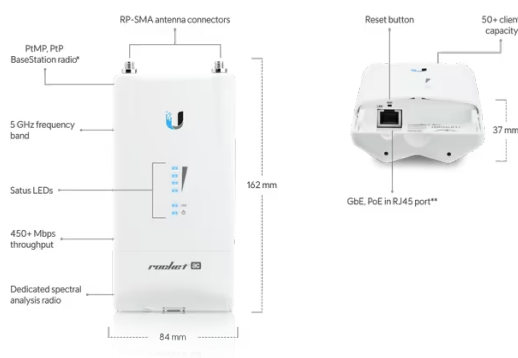

\*Compatible with airMAX devices.  
\*\*24V DC, 0.5A GbE PoE adapter included.

### Mechanical

Dimensions	162 x 84 x 37 mm (6.4 x 3.3 x 1.5")
Weight	250 g (8.8 oz)
Enclosure material	UV-stabilized plastic

### Hardware

Networking interface	(1) GbE RJ45 port
Power method	Passive PoE (pairs 4, 5+; 7, 8 return)
Power supply	24V, 0.5A Gigabit PoE adapter (Included)
Max. power consumption	8.5W
ESD/EMP protection	Air/contact $\pm$ 24kV
RF connectors	(2) RP-SMA (waterproof)
LEDs	Power, LAN, (4) signal strength
Shock and vibration	ETSI300-019-1.4
Operating temperature	-40 to 80° C (-40 to 176° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

### Management Radio (MHz)

Worldwide	5150 - 5875 MHz
-----------	-----------------

US/CA  
U-NII-1  
U-NII-2A  
U-NII-2C  
U-NII-3

5150 - 5250 MHz  
5250 - 5350 MHz  
5470 - 5725 MHz  
5725 - 5850 MHz

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.