



UniFi UISP Branding


access ultra




Switching



WiFi



Camera Security



Door Access



CloudKeys & Gateways





Power Tech



Inte

Hubs > Access Ultra

Datasheet In The Box Marketing Images Installation Guide

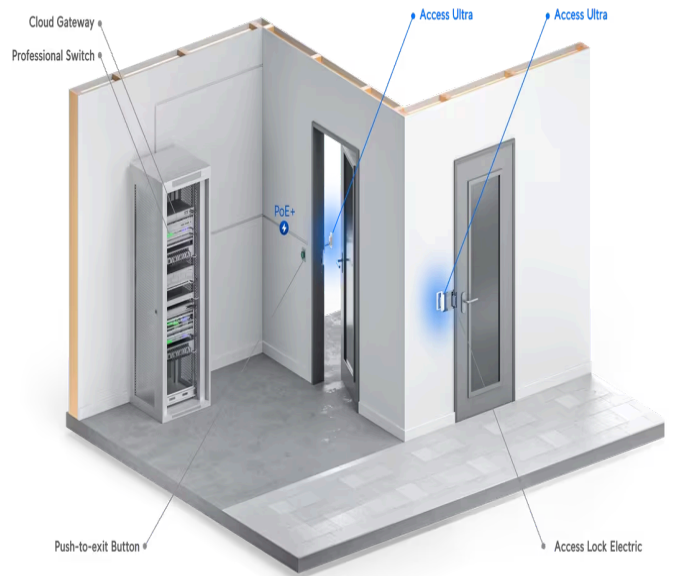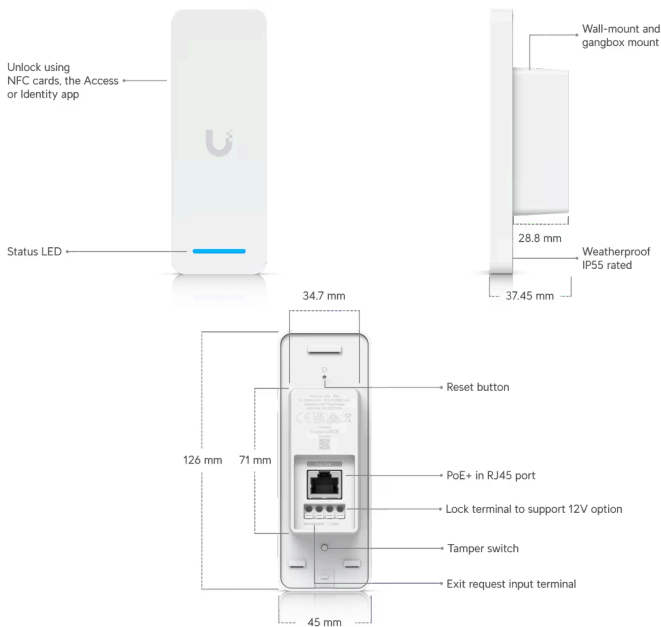

### Mechanical

Dimensions 126 x 45 x 37.45 mm (4.9 x 1.8 x 4.5")

Weight 140 g (4.9 oz)

Enclosure material Polycarbonate, aluminum alloy

Mounting Wall mount, gang box mount

Weatherproofing IP55

### Hardware

<b>Networking interface</b>	10/100 MbE RJ45 port
<b>Connectivity</b>	Ethernet BLE 4.2
<b>Digital input</b>	(1) Exit request
<b>Lock terminals</b>	(1) 12V DC, 1A
<b>Power method</b>	PoE+
<b>Max. power consumption</b>	18W
<b>ESD/EMP protection</b>	Air: ±8kV, contact: ± 4kV
<b>LEDs</b>	R/G/B/W (Learn more)
<b>Button</b>	(1) Factory reset
<b>Tamper switch</b>	Yes
<b>Speaker</b>	Buzzer
<b>NFC frequency</b>	13.56 Mhz
<b>NFC read range</b>	< 50 mm
<b>NFC standards</b>	ISO 14443A, 14443B, 15693
<b>NFC technology</b>	NFC Tag 1,2,3,4,5 MIFARE Classic MIFARE Plus Mifare Ultralight MIFARE DESFire
<b>Ambient operating temperature</b>	-30 to 40° C (-22 to 104° F)
<b>Ambient operating humidity</b>	5 to 90% noncondensing
<b>Certifications</b>	CE, FCC, IC

### Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.