

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

Switching > Aggregation

Datasheet

Installation Guide

Marketing Images

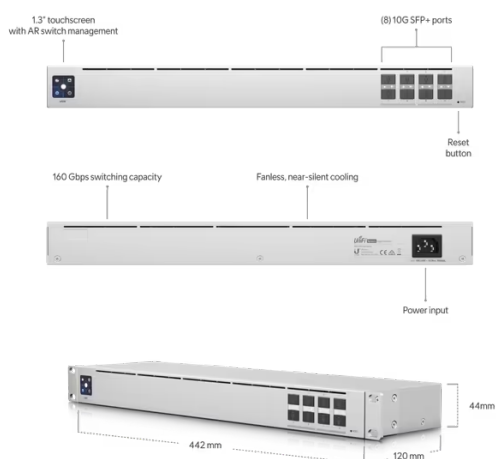

Mechanical

Dimensions	442.4 x 120 x 43.7 mm (17.4 x 4.7 x 1.7")
Weight	Without mounting brackets: 2.6 kg (5.8 lb) With mounting brackets: 2.7 kg (6 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(8) 10G SFP+ ports
Total non-blocking throughput	80 Gbps
Switching capacity	160 Gbps
Forwarding rate	119.04 Mpps
Power method	Universal input, 100—240V AC, 50/60 Hz
Power supply	AC/DC, internal, 36W
Supported voltage range	100—240V AC
Max. power consumption	30W
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
Max. number of supported SFP+ modules	UACC-OM-MM-10G: 8 UACC-OM-SM-10G: 8 UACC-CM-RJ45-10G: 4 UACC-CM-RJ45-MG: 4
Services	SMB Layer 2 GbE switch
LCM display	(1) 1.3" LCM color touchscreen
Button	Factory reset

Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
SFP+	Link/activity

Application Requirements

UniFi Network	Version 5.14.12 and later
---------------	---------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.