

UniFi UISP Branding

Q

Search UniFi products

Switching WiFi Camera Security Door Access Integrations Advanced Hosting


Dome & Turret > [G4 Dome](#)

Datasheet

In The Box

Marketing Images

Installation Guide

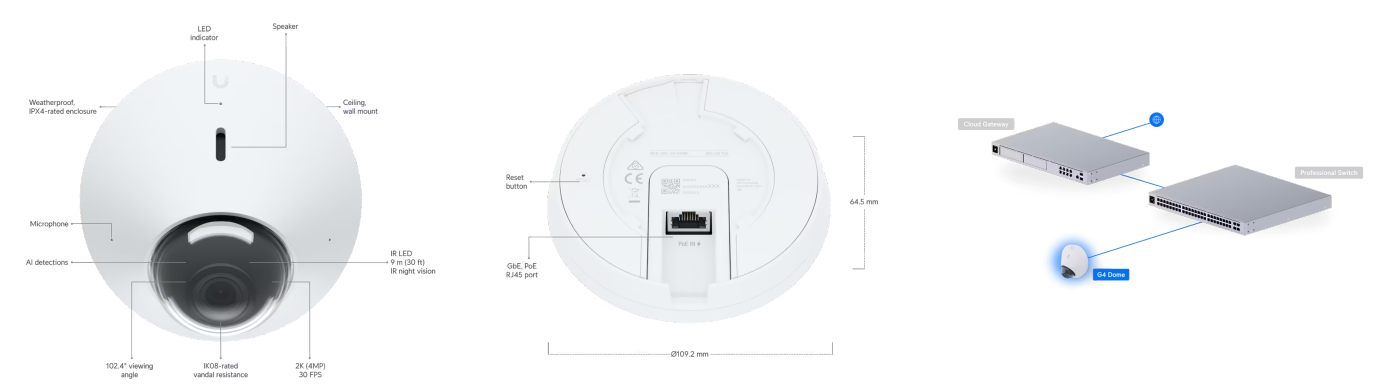

Overview

Dimensions	Ø109.2 x 64.5 mm (Ø4.3 x 2.5")
IR Night Vision	9 m (30 ft)
Smart Detections (People, Vehicles, Animals)	✓
Resolution	2K
Field of View	H: 102.4°, V: 71.4°, D: 134.3°
Audio	Two-way audio
Weatherproofing	IPX4
Tamper Resistance	IK08
Mounting	Wall, ceiling mount (Included) Junction box, arm mount (Optional)

^ Performance

Networking Interface GbE RJ45 port

Video

Image Settings Brightness, contrast, sharpness, saturation, noise reduction, 50/60 Hz

Max. Frame Rate 24 FPS

Resolution 4MP 2688 x 1512 (16:9)

Optics

Sensor 5MP CMOS

Lens Fixed focal length

Night Mode Built-in light sensor, IR LED illumination and IR cut filter

^ Hardware

Max. Power Consumption 5W

Supported Voltage Range 44—57V DC

Power Method PoE

Processor Quad-core Arm® Cortex®-A53 based chip

Weight Without mount: 370 g (13.1 oz)
With mount: 390 g (13.8 oz)

Enclosure Material Aluminum alloy, polycarbonate, hard-coated dome

Mount Material Polycarbonate, stainless steel

Button (1) Factory-reset

Ambient Operating Temperature -20 to 40° C (-4 to 104° F)

Ambient Operating Humidity 0 to 90% noncondensing

Certifications CE, FCC, IC

NDAA Compliant ✓

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.